



VENTURELITE® 2025


Aluminium Treadplate Faced, Aluminium Honeycomb Panel

DESCRIPTION

VENTURELITE® 2025 is an aluminium honeycomb panel faced with an aluminium treadplate sheet. The panel is light weight and non-combustible.

Strain-hardened hexagonal cell aluminium honeycomb has optimum mechanical properties and is able to carry shear loads at much lower weight than foams or other core types.

VENTURELITE® 2025 has been designed for general purpose industrial and marine applications where a light weight treadplate surface is required.

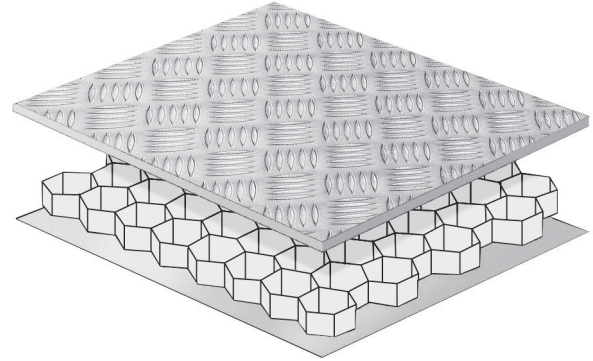

ACCREDITATIONS

- Meets ISO 1182 requirements, for Non-Combustibility of aluminium honeycomb core
- Aluminium honeycomb core meets the requirements of AMS-C-7438 for salt fog anti-corrosion performance

FEATURES

- Low weight
- High stiffness
- Easy to fabricate
- Recyclable
- Treadplate and mill finish aluminium face sheets are 5000 series alloy, for maximum strength and anti-corrosion performance
- Panels can be produced with different aluminium treadplate thicknesses including 1.6/2.7mm; 2.0/3.1mm; and 3.0/4.1mm
- Aluminium back face sheets are available in a range of thicknesses including 0.3mm, 0.5mm, 0.8mm and 1mm. 0.5mm is the standard thickness
- 6.35mm cell size
- Wide selection of AYRES® Profiles & Assembly Accessories are available



VENTURELITE® 2025

Aluminium Treadplate Faced, Aluminium Honeycomb Panel

PHYSICAL AND MECHANICAL PERFORMANCE

| Thickness (mm) | Weight (kg/m ²) | Long Beam | | Climbing Drum Peel (N/76mm) | Flatwise Compression (MPa) |
|-------------------|--------------------------------|-----------------------|-----------------------------------|-----------------------------------|----------------------------------|
| | | Max Load (Newtons) | Deflection at Max Load (mm) | | |
| 10 | 7.0 | 990 | 20 | 461 | 2.3 |
| 20 | 7.6 | 1947 | 10 | 461 | 2.3 |
| 30 | 8.1 | 2865 | 7 | 461 | 2.3 |

Typical room temperature properties for 0.5mm aluminium faced panels. Mechanical test procedures to AMS-STD-401

AVAILABILITY

| Standard Dimensions |
|--------------------------------------|
| 2400mm x 1200mm |
| Panel Thickness |
| Made to order, minimum thickness 6mm |

SAFETY

As with cutting operations on most materials, avoid inhalation and eye contact with machining dust. Wear protective equipment such as hearing protection and safety glasses during any cutting operations. Use machine guards. Wear gloves to avoid cuts. Wash hands before eating, drinking or smoking and after finishing work.

APPLICATIONS

- Hatch covers
- Floor sections
- Campervan fabrication
- Platforms
- General industrial and marine applications

FABRICATION

VENTURELITE® 2025 can be easily cut and drilled with standard tools, such as circular saws, routers etc. Negative rake blades are recommended for circular saws. Caution should be taken in case of aluminium burrs on cut edges. Face sheets must be kept clean and free from any oil or grease before painting or bonding.

Components and complete interiors can be fabricated using AYRES® Profiles & Assembly Accessories, cutters and polyurethane paste adhesives.



Ayres Composite Panels Pty Ltd
 21-23 Clune Street
 Bayswater WA 6053, Australia
 T: +61 8 9279 3426
 enquiries@ayrescom.com

Ayres Composite Panels USA LLC
 5460 Business Parkway
 Theodore AL 36582, USA
 T: +1 251.653.0700
 usa@ayrescom.com

www.ayrescom.com

* Registered Trade Mark of Ayres Composite Panels

IMPORTANT All information is given in good faith but without acceptance of liability. Ayres Composite Panels reserves the right to alter specification without prior notice. It remains the responsibility of the customer to ensure the suitability of any product for the purposes intended. All sales are made subject to Ayres Composite Panels [standard terms and conditions of sale](#). Please direct all [enquiries here](#).